

DEEP CYCLE

**CONSTANT
POWER[®]**

AGM TECHNOLOGY

AGMCP12V-105 BCI GROUP 27

FEATURES & BENEFITS

- True deep cycle AGM technology-GREEN SOLUTION
- Over 99.99% virgin lead for grid plate and active material
- Heavy duty grid/paste design for deep cycle application
- Maintenance free, non-spillable, valve-regulated
- Double separator configuration: long cycle life & High energy density and super anti-vibration design
- Low self-discharge for longer shelf life



ELECTRICAL SPECIFICATIONS

Voltage(V)	Capacity (AH)					Reserve Capacity (Min)		
	100HR	20HR	10HR	5HR	3HR	@25A	@56A	@75A
12	115	108	104	96	90	220	80	55


PHYSICAL SPECIFICATIONS

Model	Dimensions (mm/inches)				Weight (kg/lbs)	Terminal Type (Standard)	Case Material
	Length	Width	Height	Total Height			
AGMCP12V-105	306 (12.05)	168 (6.61)	208 (8.19)	214 (8.43)	27.6 (60.9)	T6-A	ABS

Operating Temperature Range		
Discharge	Charge	Storage
-15°C ~ 50°C (5°F ~ 122°F)	0°C ~ 40°C (32°F ~ 104°F)	-15°C ~ 40°C (5°F ~ 104°F)

AGMCP12V-105


DIMENSIONS

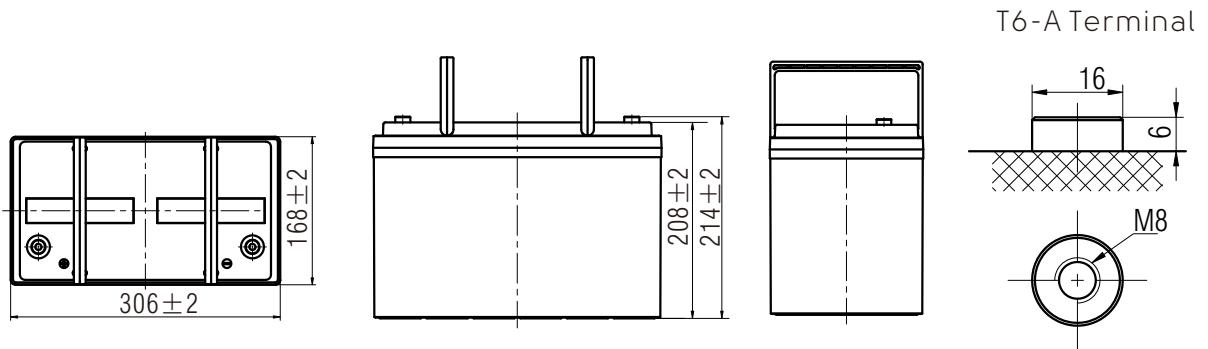


Note: Terminal Torque Values in-lb(Nm) : 97.28-130.0(11-14.7)

PERFORMANCE CHARACTERISTICS


CONSTANT POWER AGM Charging Profile

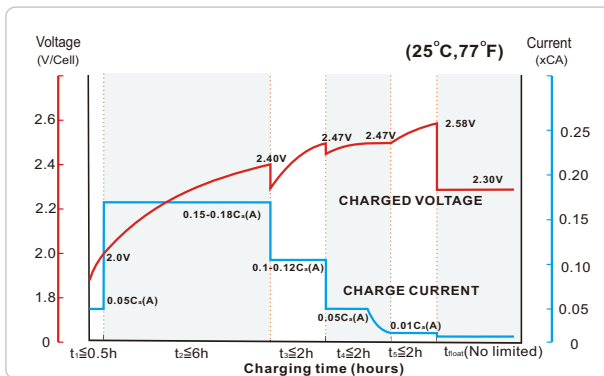


Relationship of OCV and State Of Charge ($25^{\circ}\text{C}, 77^{\circ}\text{F}$)

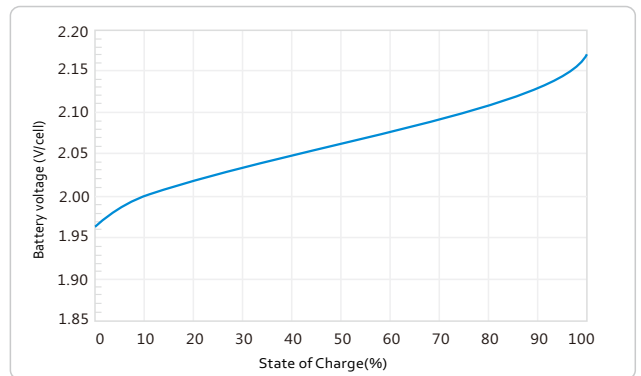

Cycle life in relation to Depth Of Discharge

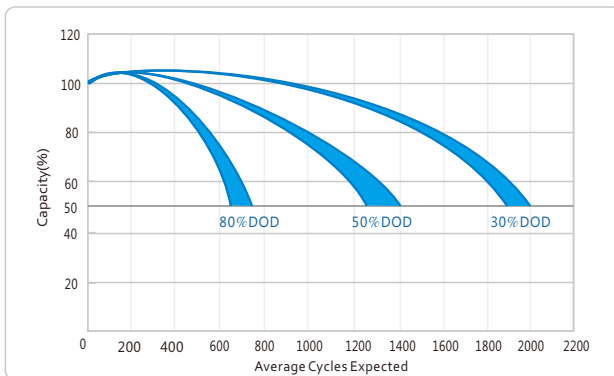

Self-discharge Characteristic

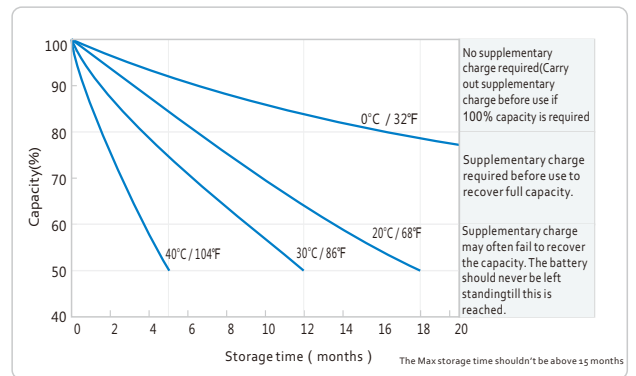

Distributed by
EAST COAST BATTERY:
 100 SW 17th Street Ft.
 Lauderdale, FL 33315
 Ph: 954-522-2403
www.eastcoastbattery.com