

AGMCP12V-200DT BCI GROUP 4D

FEATURES & BENEFITS

- True deep cycle AGM technology-GREEN SOLUTION
- Over 99.99% virgin lead for grid plate and active material
- Heavy duty grid/paste design for deep cycle application
- Maintenance free, non-spillable, valve-regulated
- Double separator configuration:long cycle life & High energy density and super anti-vibration design
- Low self-discharge for longer shelf life



ELECTRICAL SPECIFICATIONS

Voltage(V)	Capacity (AH)					Reserve Capacity (Min)		
	100HR	20HR	10HR	5HR	3HR	@25A	@56A	@75A
12	215	200	190	172	160	445	/	115

PHYSICAL SPECIFICATIONS

Model	Dimensions (mm/inches)				Waisht (ks/lba)	Terminal Type	One o Material
	Length	Width	Height	Total Height	Weight (kg/lbs)	(Standard)	Case Material
CP12V-200DT	527 (20.75)	214 (8.43)	220 (8.74)	244 (9.61)	56.1 (123.7)	DT-3/8	PP

Operating Temperature Range					
Discharge	Charge	Storage			
-15°C~50°C(5°F~122°F)	0°C~40°C(32°F~104°F)	-15°C~40°C(5°F~104°F)			








AGMCP12V-200DT

DIMENSIONS



90 100

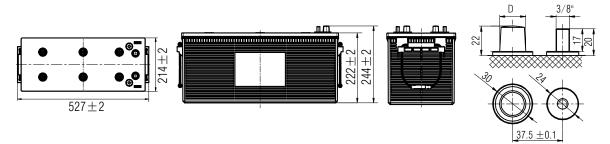

2.20

2.15

2.10

2.05

2.00

1.95

1.90


1.85

0 10


Battery voltage (V/cell)

Note: D:Positive 19. 5⁰_{-0.3}, D:Negative 17. 9⁰_{-0.3}; Terminal Torque Values in - Ib(Nm) : 176-203(20-23)

PERFORMANCE CHARACTERISTICS

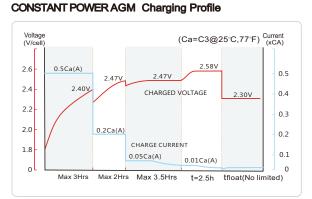


Cycle life in relation to Depth Of Discharge

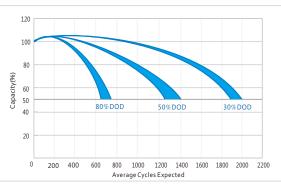

20 State of Charge(%)

30 40 50 60 70 80

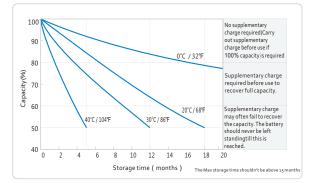

Relationship of OCV and State Of Charge (25°C,77°F)

Self-discharge Characteristic

Distributed by EAST COAST BATTERY: 100 SW 17Th Street Ft. Lauderdale, FL 33315 Ph: 954-522-2403 www.eastcoastbattery.com