



Series	4500	Warranty	4 Years
Volts	6	BCI	L16
Cells	3	Plates/Cell	11
Terminal Type	LT		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18		
Cables	Optional: 19" 4/0 interconnect cable		

Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Recommended Charge Current	45 A
Maximum Charge Current	70 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	871
Marine Crank Amps (MCA) 32°F / 0°C	1088
Reserve Capacity (RC @ 25A)	890 Minutes
Reserve Capacity (RC @ 75A)	297 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	479 AH	4.79 A
@ 72 Hour Rate	453 AH	6.29 A
@ 50 Hour Rate	429 AH	8.57 A
@ 20 Hour Rate	371 AH	18.55 A
@ 15 Hour Rate	345 AH	23.00 A
@ 10 Hour Rate	330 AH	33.02 A
@ 8 Hour Rate	319 AH	39.88 A
@ 5 Hour Rate	297 AH	59.36 A
@ 1 Hour Rate	167 AH	166.95 A


Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications

 SAI GLOBAL ISO 9001 Quality	Weight	59 kg	130 lbs
	Length	31.8 cm	12.5"
	Width	18.1 cm	7.13"
	Height Inc. Term.	42.55 cm	16.75"
Electrolyte Reserve	57 mm	2.25"	
Container	High Density Polypropylene		
Cover	High Density Polypropylene		
Handles	Rope / Plastic Handle		

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Cycle Life vs. Depth of Discharge

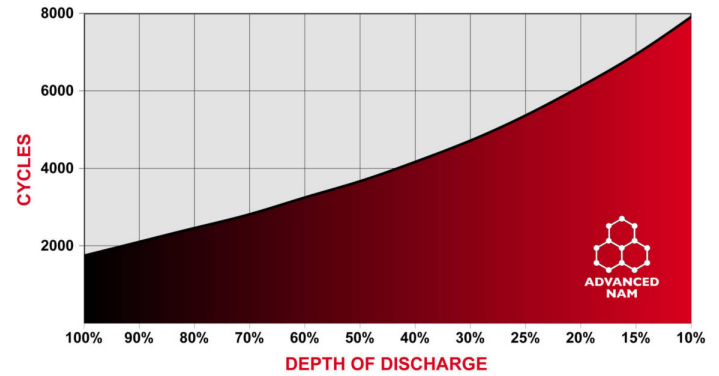

Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.05 V	2.02 V	1.96 V	1.75 V
6 HR AH RATE	2.10 V	2.04 V	2.00 V	1.95 V	1.75 V
1 HR AH RATE	2.10 V	2.03 V	1.99 V	1.94 V	1.75 V

Detailed Illustration

